


Range Chart

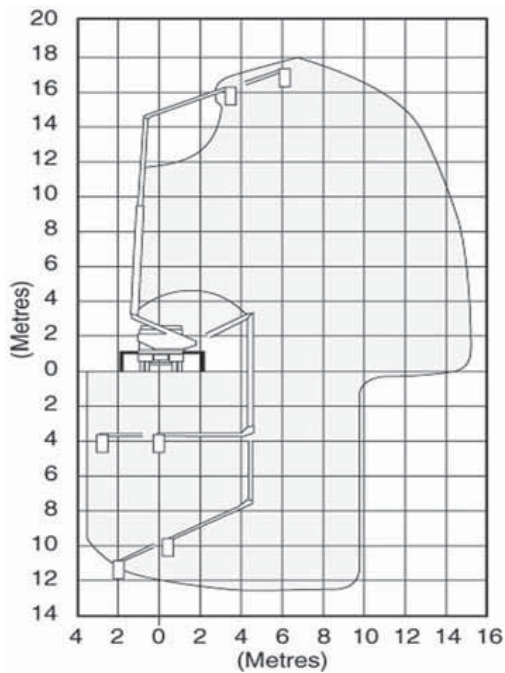

UNDER-BRIDGE INSPECTION UNIT

For more information on this equipment or if you require a free onsite inspection, contact our team

136 132

Specifications

Max working height	18 m
Max work extension under bridge	8 m
Safe working load	200 kg
Max working radius	15 m
Stabiliser spread (at 180°)	3.40 m
Stabiliser spread (at 360°)	4.50 m
Max work depth below ground level	12 m
Travelling height	3.60 m
Travelling width (stowed)	2.50 m
Travelling length	8 m
Overall weight	12200 kg
240 volt outlet in basket	
This unit can be mobile when boom is overside	
Road Rail units available (STD & Wide gauge only)	14000 kg